



CAR PARK SOLUTIONS


TRAFFICO® CAR LIFT

TRAFFICO® is a perfect solution when higher throughput is required. It provides high level of comfort and offers numerous options that can be individually customised.

© Nicole Zimmermann | CarLoft® GmbH, Berlin

BENEFITS

- Quick and safe transportation
- High level of comfort and luxury operating elements
- Automatic travel in case of systems with two stopping points
- Particularly suitable for up to 40 parking places
- Numerous options for individual customisation
- Triple safety for car protection
- According to the safety rules for the construction and installation of lifts EN81-20
- Nominal speed up to 1,0 m/s possible (upon request)



© Nicole Zimmermann | CarLoft® GmbH, Berlin



TRAFFICO® CAR LIFT | CHARACTERISTICS

INCLUDED


- LED-Lighting
- Side panels and ceiling made of steel sheets
- Operating panel with cover plate made of stainless steel
- Hard wood ram protection
- Door made of galvanised steel
- Operating panels with position indicator for cars
- Tripple security through sensor technology

UPON CUSTOMER REQUEST

- Door finished in stainless steel
- Door frames finished in stainless steel
- Weather-proof design, protection degree IP54
- Special paint finishes for floor, doors, cabin walls and ceiling
- Radio remote control
- Call box
- Additional position indicator for cars
- Noise protection package
- Control and aggregate in one cabin
- Variable cabin equipment



TRAFFICO® CAR LIFT | SHAFT LAYOUT

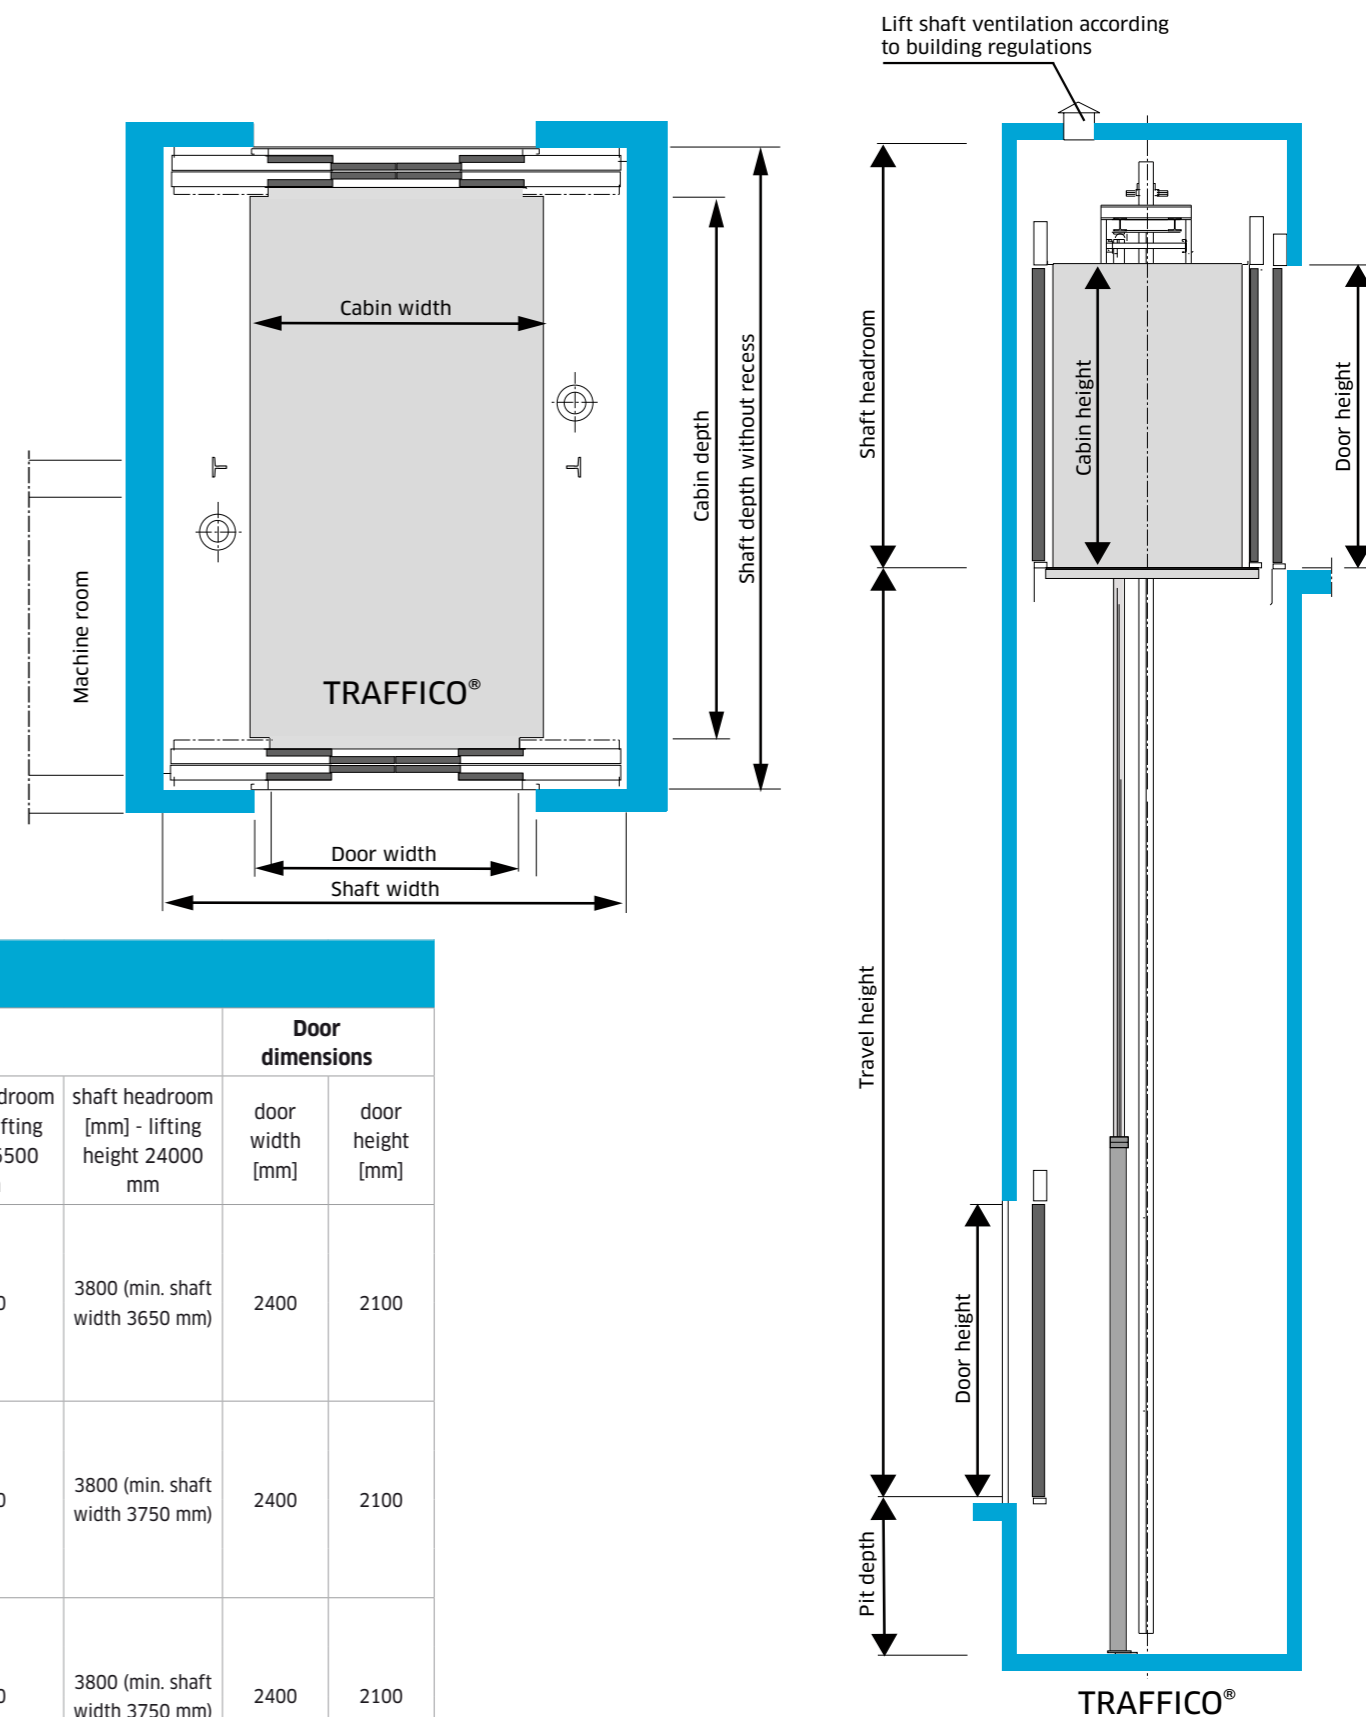

TECHNICAL DATA

Type	Car dimensions			Rated load [kg]	Door	Pos. of access	Dimensions of elevator shaft						Door dimensions			
	car width [mm]	car depth [mm]	car height [mm]				shaft width [mm]	shaft depth with recess [mm]	shaft depth without recess [mm]	pit [mm]	shaft headroom [mm] - lifting height 3600 mm	shaft headroom [mm] - lifting height 6500 mm	shaft headroom [mm] - lifting height 24000 mm	door width [mm]	door height [mm]	
TRAFFICO® T42	2700	5500	2100	4200	4-panel-door	front only	1250	3800	3800	3800	3800 (min. shaft width 3650 mm)	2400	2100			
					6-panel-door	front only								3400	5950	6065
					4-panel-door	through car								3800	5960	6140
					6-panel-door	through car								3400	6090	6320
TRAFFICO® T45	2800	5800	2100	4550	4-panel-door	front only	1250	3800	3800	3800	3800 (min. shaft width 3750 mm)	2400	2100			
					6-panel-door	front only								3550	6250	6365
					4-panel-door	through car								3800	6260	6440
					6-panel-door	through car								3550	6390	6620
TRAFFICO® T48	2800	6200	2100	4850	4-panel-door	front only	1250	3800	3800	3800	3800 (min. shaft width 3750 mm)	2400	2100			
					6-panel-door	front only								3550	6650	6765
					4-panel-door	through car								3800	6660	6840
					6-panel-door	through car								3550	6790	7020

The shaft headroom depends on the selected lifting height, door width and the drive variant. Please contact us if you would like to adjust the standard dimensions.



CAR PARK SOLUTIONS

TRAFFICO® CAR LIFT | REFERENCES



Berlin, Germany

© Vitra | CarLoft® GmbH Berlin




Müggenkampstrasse - Hamburg, Germany



Wildbachstrasse - Zürich, Switzerland



Underground car park - Zürich, Switzerland

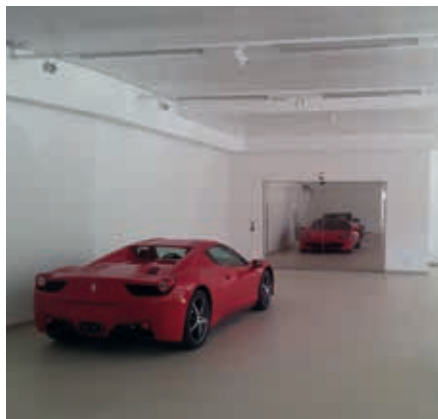


Garage Zenith SA - Sion, Switzerland



Garage Swissotel - Zürich, Switzerland



Münchhaldeneck - Zürich, Switzerland

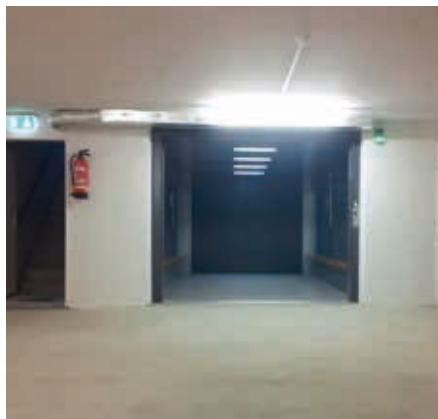

Dorfstrasse, Winterthur - Zürich, Switzerland



Bollerweg - Wädenswil, Switzerland



WE WOULD BE PLEASED TO ADVISE YOU:

Lödige Industries GmbH | Wilhelm-Lödige-Str. 1
34414 Warburg | Germany
Tel.: +49 5642 702-0 | Fax: +49 5642 702-111
Email: info@lodige.com

WWW.LODIGE.COM

Lödige-CPS-FLY-TRAFFICO-EN-LIND-20170102



24/7 Service Hotline

We offer full service for your equipment after the installation: maintenance, spare parts, etc. Feel free to contact us.



+49 5642 702-600